

Parflange® ECO 25

Tube Flanging and Flaring Unit



Reduce Costs with Leak-Free Connections

The Parflange® ECO 25 is the economical way to produce leak-free Seal-Lok™ O-ring Face Seal and Triple-Lok® JIC tube connections.

- Flanges and flares
- Only requires one die per tube size for both flanging and flaring
- Not dependent on wall thickness
- 110V single-phase power requirement
- Produces consistent flare/flange quality
- Easy operation
- Easily moves anywhere in the shop
- Flanges and flares same tube sizes as Parflange® Pro 50 production model



Contact Information:

Parker Hannifin Corporation
Tube Fittings Division
3885 Gateway Blvd
Columbus, OH 43228

phone 614 279 7070
fax 614 279 7685

www.parker.com/tfd



Product Features:

- Flanging (90°) or flaring (37°) simply by turning die around
- Capability:
Flanging and flaring 1/4" through 1-1/2" steel and stainless steel
- Utilizes proven Orbital Spindle process for reliable flanges and flares with burnished surface finish
- Adjustable Tube Stop for range of wall thickness
- Utilizes same Parflange Pins as 1025 & Pro 50 models
- Used with Manual Hydraulic pump (purchased separately)

Specifications:

- Electrical:
110V, single-phase, 60 Hz/20A
- Dimensions:
Height: 21" (533mm)
Depth: 15" (381mm)
Width: 21" (533mm)
Weight: 202 lb (91.8kg)

ENGINEERING YOUR SUCCESS.

Improve Uptime for a Better Bottom Line

Offers Flanges and Flares with One Die.


The ECO 25 tooling dies have the flanging (90°) surface on one side and the flaring (37°) surface on the other, so one die will both flange and flare the same size tubing. In addition, because of the ECO 25's adjustable tube stop, one die works for all wall thicknesses of that size tube in both steel and stainless steel.

Utilizes the Proven Parflange Orbital Spindle Process.

The Parflange ECO 25 produces reliable, consistent flanges (90°) and flares (37°) with a smooth mating surface for leak-free Parker Seal-Lok and Triple-Lok tube connections.

Produces Fast, Leak-Free Connections.

Whether using the electric or hand hydraulic pump, the Parflange ECO 25 efficiently flanges and flares steel and stainless steel hydraulic tubing up to 1-1/2" O.D. When used with Parker Seal-Lok O-ring Face Seal fittings, the ECO 25 provides zero leak connections up to 9,200 psi.

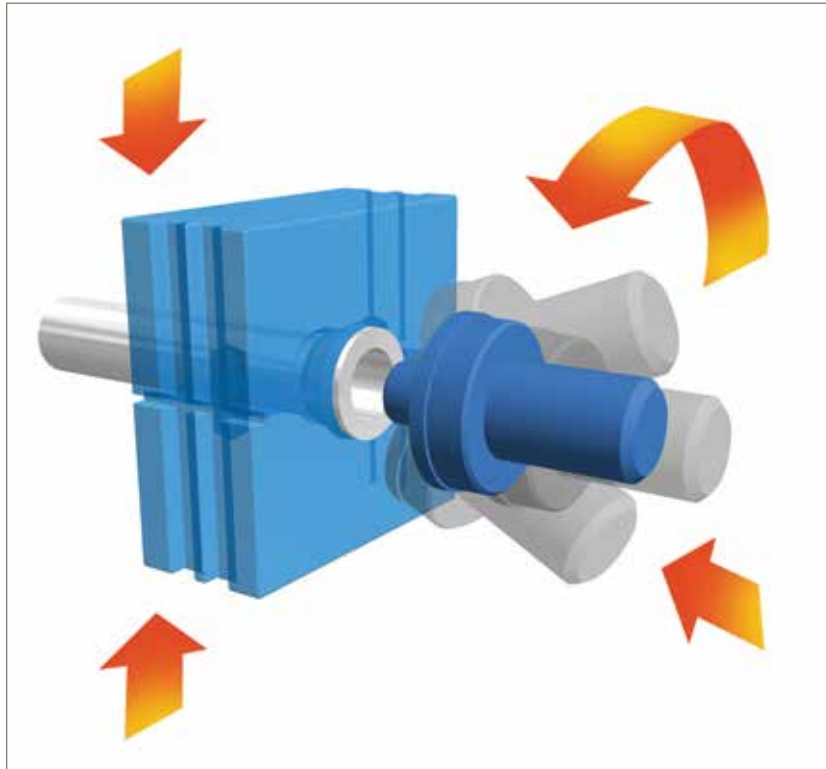

Exclusive Orbital Spindle motion produces a high-quality, reliable flange or flare.